


# bizhub 368/308

#### **Option Diagram**



## Finishing functionalities

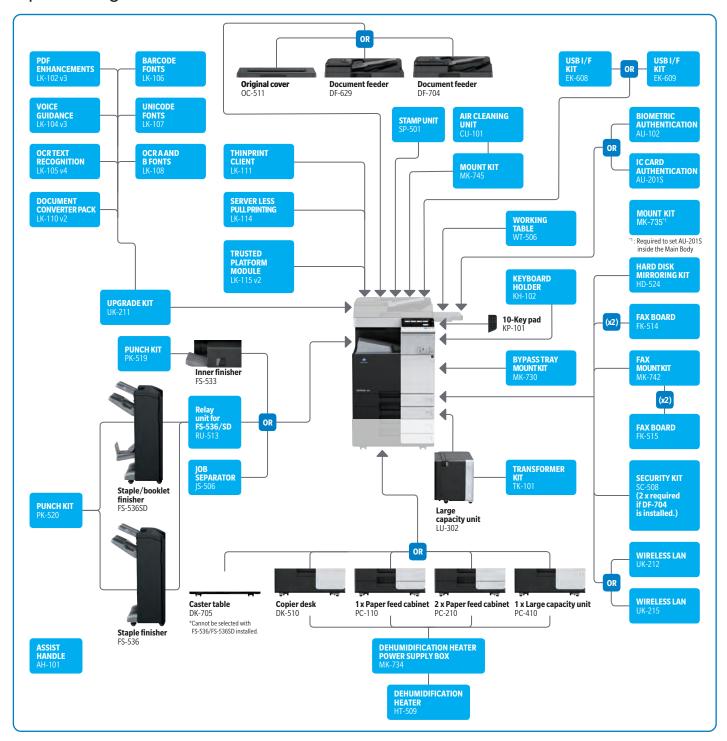



















\*2 : optional



# MFP

### bizhub 368/308

MONOCHROME MID-VOLUME MULTIFUNCTION PRINTER

**System Overview** System memory 2,048 MB (standard) System hard disk 250 GB (standard) 10-BASE-T/100-BASE-TX/1,000-BASE-T Ethernet, USB 2.0 Interface Wi-Fi 802.11a/b/g/n/ac (optional) TCP/IP (IPv4/IPv6), NetBEUI, SMB, LPD, IPP, SNMP, HTTP Network protocols Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP Frame types Automatic document Up to 100 originals, A6-A3, 35-163 gsm feeder (optional) Printable paper size A6-SRA3, customised paper sizes, banner paper max. 1,200 x 297 mm Printable paper weight 52-300 gsm Standard: 1.150 sheets. Max.: 6.650 sheets Paper input capacity Tray 1  $500 \, \text{sheets}, \, A5\text{-}A3, \, 52\text{-}256 \, \text{gsm}$ Tray 2 500 sheets, A5-SRA3, 52-256 gsm Tray 3 PC-110 (optional) 500 sheets, A5-A3, 52-256 gsm Tray 4 PC-210 (optional)  $2 \times 500$  sheets, A5-A3, 52-256 gsm 2,500 sheets, A4, 52-256 gsm Paper feed cabinet PC-410 (optional) Large capacity unit 3,000 sheets, A4/Letter, 52-256 gsm LU-302 (optional) Bypass tray 150 sheets, A5-SRA3, custom sizes, banner, 60-300 gsm Automatic duplexing A5-SRA3, 52-256 gsm Group, sort, staple, punch, output tray, booklet, Finishing modes (optional) centre fold, letter fold, Z-fold Power consumption [220-240 V, 50/60 Hz] less than 1.95 kW (system) [120 V, 60 Hz] less than 1.5 kW (system) [110 V, 50/60 Hz] less than 1.5 kW (system) System dimensions \*1  $[W \times D \times H] 571 \times 660 \times 785.5 \text{ mm} (22.5 \times 26.0 \times 30.9 \text{ inch})$ System weight \*2 Approx. 76 kg (156.5 lb)

<sup>1</sup> Excluding ADF and lower paper tray unit 2 Including Drum/Toner bottle

<b>Copier Specifications</b>	
Copying process	Electrostatic laser copy, intermediate
Toner system	Simitri® HD Polymerized Toner
Copy/print speed A4	368: Up to 36 ppm, 308: Up to 30 ppm
Copy/print speed A3	368: Up to 18 ppm, 308: Up to 15 ppm
1st copy out time	368: 5.0 sec., 308: 5.4 sec.
Warm-up time *3*4	368: 20 sec., 308: 18 sec. or less *3, 20 sec. or less *4
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	A5-A3
Magnification	25-400% in 0.1% steps, auto-zooming
*3 Time period from when the sub power off	mode is released to when this machine is ready for printing while the Main Switch is in the ON stat

<sup>&</sup>lt;sup>14</sup> Time period from when the Main Power Switch is turned on to when this machine becomes ready for printing.

Print resolution	1,800 (equivalent) x 600 dpi, 1,200 x 1,200 dpi
Page Description Language	PostScript 3 (3016) Emulation, PCL 6 (XL Version 3.0) Emulation, PCL 5e/c Emulation, XPS
Operating systems	Windows Vista (32/64), Windows 7 (32/64), Windows 8.1 (32/64), Windows 10 (32/64), Windows Server 2008 (32/64), Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Macintosh OS X 10.7 or later, Linux, Unix, Citrix
Printer fonts	80 PCL, 137 PostScript 3 Emulation
Mobile printing	AirPrint (iOS), Mopria (Android), Google Cloud Print (optional), Wi-Fi Direct (optional), Konica Minolta Print Service (Android), PageScope Mobile (iOS, Android, Windows 10 Mobile)

<b>Scanner Specifications</b>	
Scan speed *5 with DF-629	1-sided original: 55 ipm
(optional)	2-sided original: 26 ipm
Scan speed *5 with DF-704	1-sided original: 55 ipm
(optional)	2-sided original: 110 ipm
Resolution	Max.: 600 x 600 dpi
Scan modes	Scan to Email, Scan to PC (SMB), Scan to FTP, Scan to WebDAV, Scar to BOX (HDD), Scan to WSD (Web Service), Scan to DPWS (Device Profile for Web Service), Scan to USB memory, Network TWAIN scan
File formats	JPEG, TIFF, PDF, PDF/A-1a (optional), PDF/A 1-b (optional), compact PDF, encrypted PDF and searchable PDF (optional), XPS, compact XPS, PPTX, searchable PPTX (optional), searchable DOCX/XLSX (optional)
Destinations	2,100 (single + group), LDAP, PSDA support

<sup>&</sup>quot;5 When copying A4 or Letter (8-1/2 x 11), resolution 600 dpi

A3 multifunctional with 36/30 ppm b/w. Standard Emperon™ print controller with PCL 6, PCL 5, PostScript 3, PDF 1.7, XPS, and OOXML support. Paper capacity of 500 + 500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52 - 300 gsm. 2 GB memory, 250 GB hard disk and Gigabit Ethernet standard.

Fax Specifications (optional)		
Fax	Super G3	
Transmission	Analog fax, Internet fax, Colour Internet fax, IP address fax	
Resolution	Max.: 600 x 600 dpi (ultra-fine)	
Compression method	MH, MR, MMR, JBIG	
Modem speed	Up to 33.6 Kbps	
Destinations	2,100 (single + group)	

Components and Options	
DK-510 Copier desk	Provides storage space for print media and other materials
DK-705 Caster table	Used to install this machine on the floor
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit for FS-533	2/4 hole punching, autoswitching
FS-536 Staple finisher	50-sheet stapling,
50 5360D Ct	tray1: max. 200-sheet output, tray2: max. 3,000-sheet output
FS-536SD Staple/booklet finisher	50-sheet staple finisher, 20-sheet booklet finisher,
DILL E12 Deleviorit for ES E26 /SD	tray1: max. 200-sheet output, tray2: max. 2,000-sheet output For FS-536/SD installation
RU-513 Relay unit for FS-536/SD	
PK-520 Punch kit for FS-536/SD	2/4 hole punching, Auto switching
JS-506 Job separator	Separation for fax output, etc.
CU-101 Air cleaning unit	Improving indoor air quality by reduced emissions
MK-745 Mount kit for CU-101	Installation kit for CU-101
MK-730 Mount kit for bypass tray	
HT-509 Dehumidification heater	Dehumidification heater for Paper feed cabinet,
	for PC-110/210/410, DK-510
MK-734 Dehumidification heater power supply box	Dehumidification heater power supply box (Cabinet heater), for PC-110/210/410, DK-510
TK-101 Transformer kit	This unit is required to enable the function heater of the Larg
TIX TO F HUNSIOHHEL KIL	capacity unit LU-302
KP-101 10-Key pad	10-key
DF-629 Document feeder	Reversing automatic document feeder, capacity 100 original
DF-704 Document feeder	Dualscan automatic document feeder, capacity 100 originals
SP-501 Stamp unit	Stamps a scanned original when sending a fax
OC-511 Original cover	Cover instead of ADF
WT-506 Working table	Authentication device placement
AH-101 Assist handle	Assist handle
FK-514 Fax board	Super G3 fax, fax functionality for 1st and 2nd line
FK-515 Fax board	Super G3 fax, fax functionality for 3rd and 4th line
MK-742 Mount kit for FK-515	Installation kit for FK-515
UK-211 Upgrade kit	2 GB memory extension for upgrades
LK-102 v3 PDF enhancements	PDF/A, PDF encryption, digital signature
LK-104 v3 Voice guidance	Provides voice guidance functions
LK-105 v4 OCR text recognition	Searchable PDF and PPTX, PDF/A-1a
LK-106 Barcode fonts	Supports native barcode printing
LK-100 Barcode fonts	Supports native barcode printing  Supports native Unicode printing
LK-107 Officode forts	Supports native Officed printing  Supports native OCR A and B font printing
LK-110 v2 Document converter pack	
LK-110 V2 Document converter pack  LK-111 ThinPrint®Client	Print data compression for reduced network impact
LK-114 Server-less pull printing	
LK-114 Server-less pull printing	Server-less pull printing system  Two tod Distract Module for protection of data approximation and deposition
KH-102 Keyboard holder	Trusted Platform Module for protection of data encryption and decryption To place USB keyboard
•	•
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection, Bluetooth LE
SC-508 Security kit	Copy guard function
MK-735 Mount kit	Installation kit for IC card reader
AU-201S IC card authentication	Various IC card technologies
AU-102 Biometric authentication	9
UK-212 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
UK-215 Wireless LAN	Wireless LAN and wireless LAN Simple Access Point Mode
HD-524 Hard disk mirroring kit	Back-up HDD

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities vary depending on operating systems, applications and network protocols as well as network and system configurations.
- Some of the product illustrations contain optional accessories.
   Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- $\label{eq:All brand} \textbf{All brand and product names may be registered trademarks or trademarks of their respective holders and are}$